

4V、3V300 Series Solenoid Valve,4A、3A 300 Series Pneumatic Control Valve



Ordering Code


4V	3	10	10		AC220V	
Specification Code 4V:Two(Three)-position Five-way Solenoid Valve 4A:Two(Three)-position Five- way pneumatic control Valve 3V:Two-position Three-way Solenoid Valve 3A:Two-position Three-way Pneumatic Control Valve	Series Code 300 Series	Coil and Places 10:Single-head Double-position 20:Double-head Double-position 30C:Double-head Three-position Close Type 30E:Double-head Three-position Exhaust Type 30P:Double-head Three-position Pressure Type	Port Size 08:G1/4" 10:G3/8"	Port connection and Initial State NC:Two-position Three- way Normal Close Type NO:Two-position Three- way Normal Open Type	Standard Voltage DC12V DC24V AC24V 50Hz/60Hz AC110V 50Hz/60Hz AC220V 50Hz/60Hz AC380V 50Hz/60Hz	Wiring Form Blank:Standard Connector LD:Brown With Lighting Connector LD1:White With Lighting Connector W:Lead Wire Type

Specification

Model	4V310-08	4V320-08	4V330C-08	4V330E-08	4V330P-08	4V310-10	4V320-10	4V330C-10	4V330E-10	4V330P-10
	4A310-08	4A320-08	4A330C-08	4A330E-08	4A330P-08	4A310-10	4A320-10	4A330C-10	4A330E-10	4A330P-10
Position and Way NO.	Two-position Five-way		Three-position Five-way			Two-position Five-way		Three-position Five-way		
Effective Sectional Area	25mm ² (CV=1.40)		18mm ² (CV=1.00)			30mm ² (CV=1.68)		18mm ² (CV=1.00)		
Model	3V310-08	3V320-08	3A310-08	3A320-08	3V310-10	3V320-10	3A310-10	3A320-10		
Position and Way NO.	Two-position Three-way				Two-position Three-way					
Effective Section Area	25mm ² (CV=1.40)				30mm ² (CV=1.68)					
Joint Pipe Bore	Air Inlet=Air Outlet=Exhaust=G1/4"				Air Inlet=Air Outlet=3/8" Exhaust=G1/4"					
Working Medium	40 Micron Filtered Air									
Motion Pattern	Inner Guide Type									
Working-pressure	0.15~0.8 M Pa									
Max. Pressure Resistance	1.2MPa									
Operating Temperature	5~50℃									
Voltage Range	±10%									
Power Consumption	AC: 4.5VA DC: 3W									
Insulation & Protection Class	F Class. IP65									
Wiring Form	Lead Wire or Connector Type									
Highest Action Frequency	5 Cycle / Sec									
Shortest Excitation Time	0.05 Second									


4V、3V300 Series Solenoid Valve,4A、3A300 Series Pneumatic Control Valve

Overall Dimensions

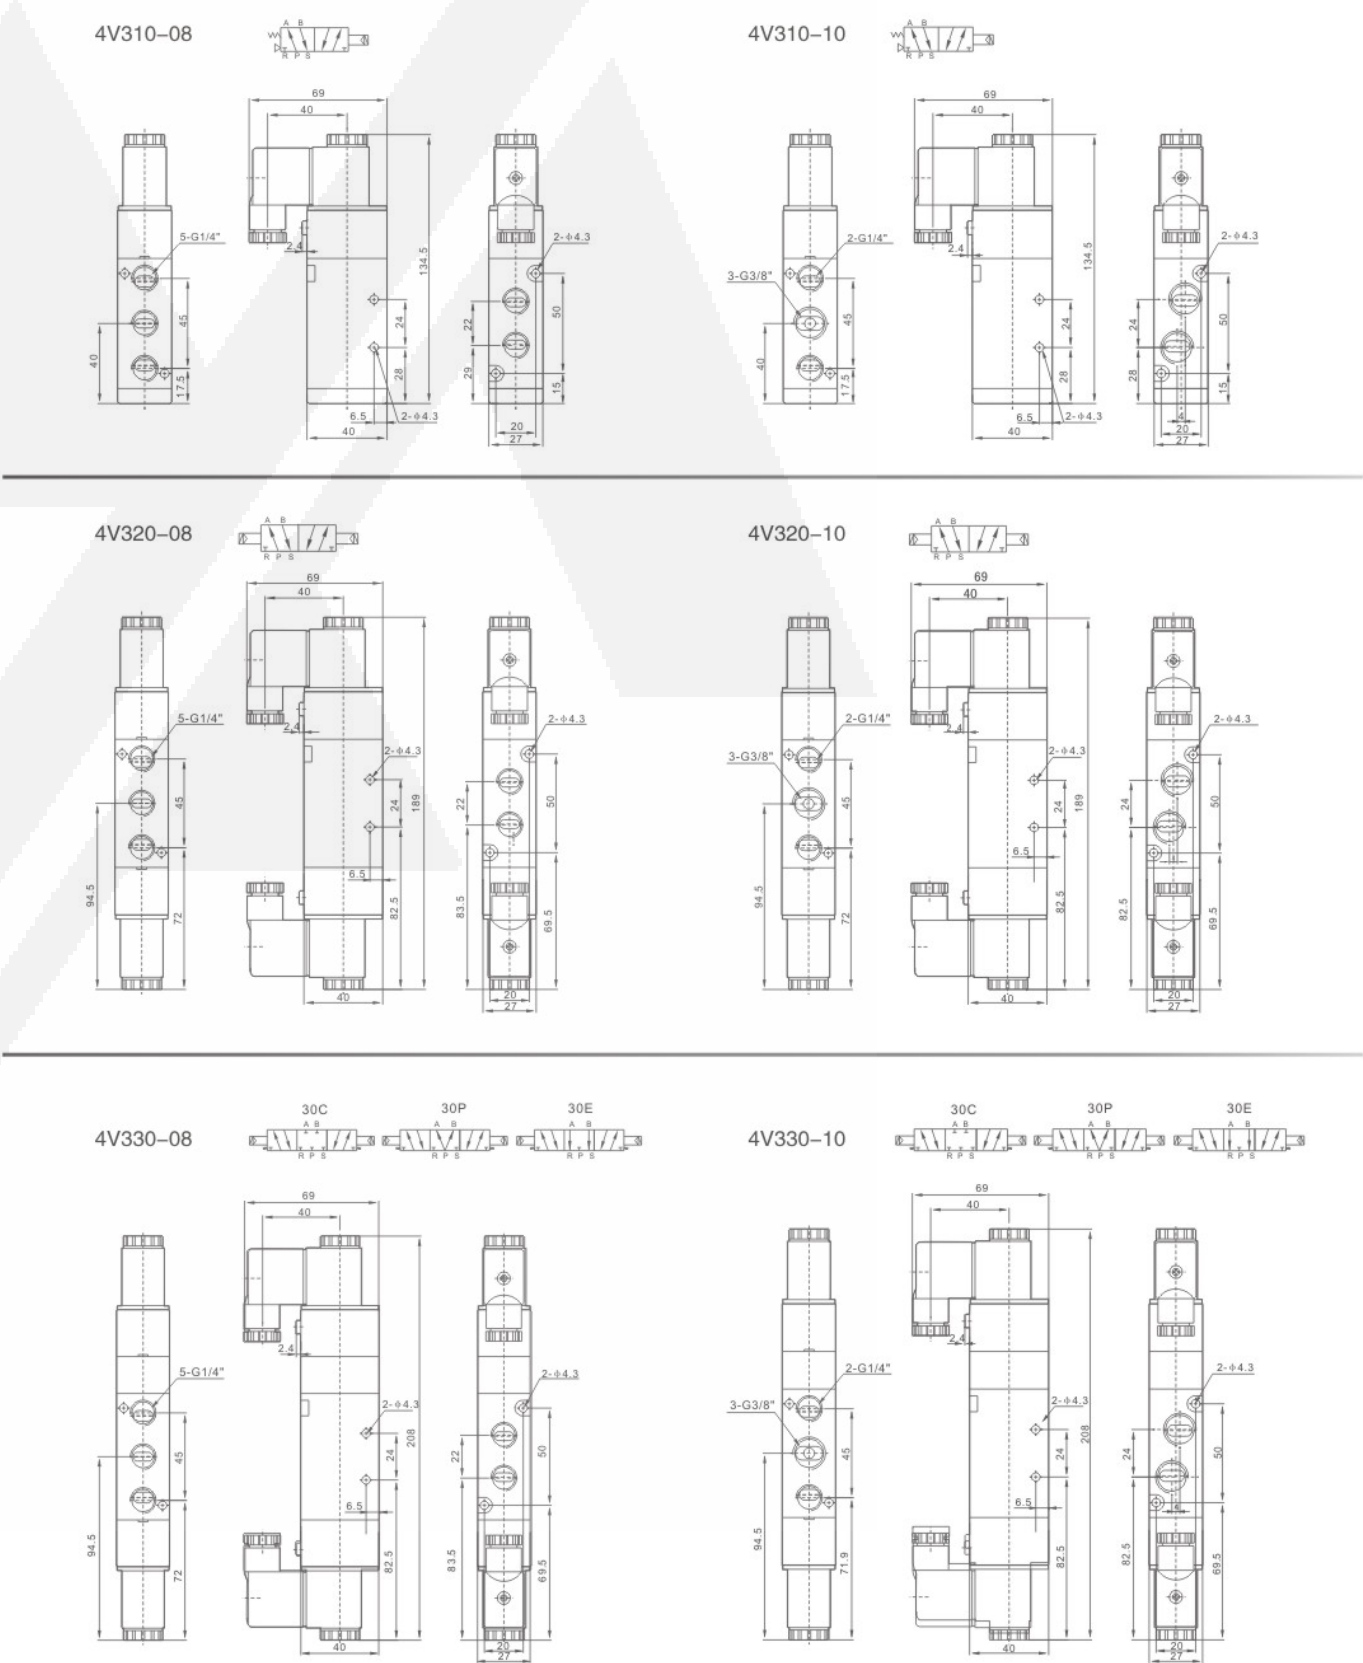

4V、3V300 Series Solenoid Valve, 4A、3A 300 Series Pneumatic Control Valve

Overall Dimensions

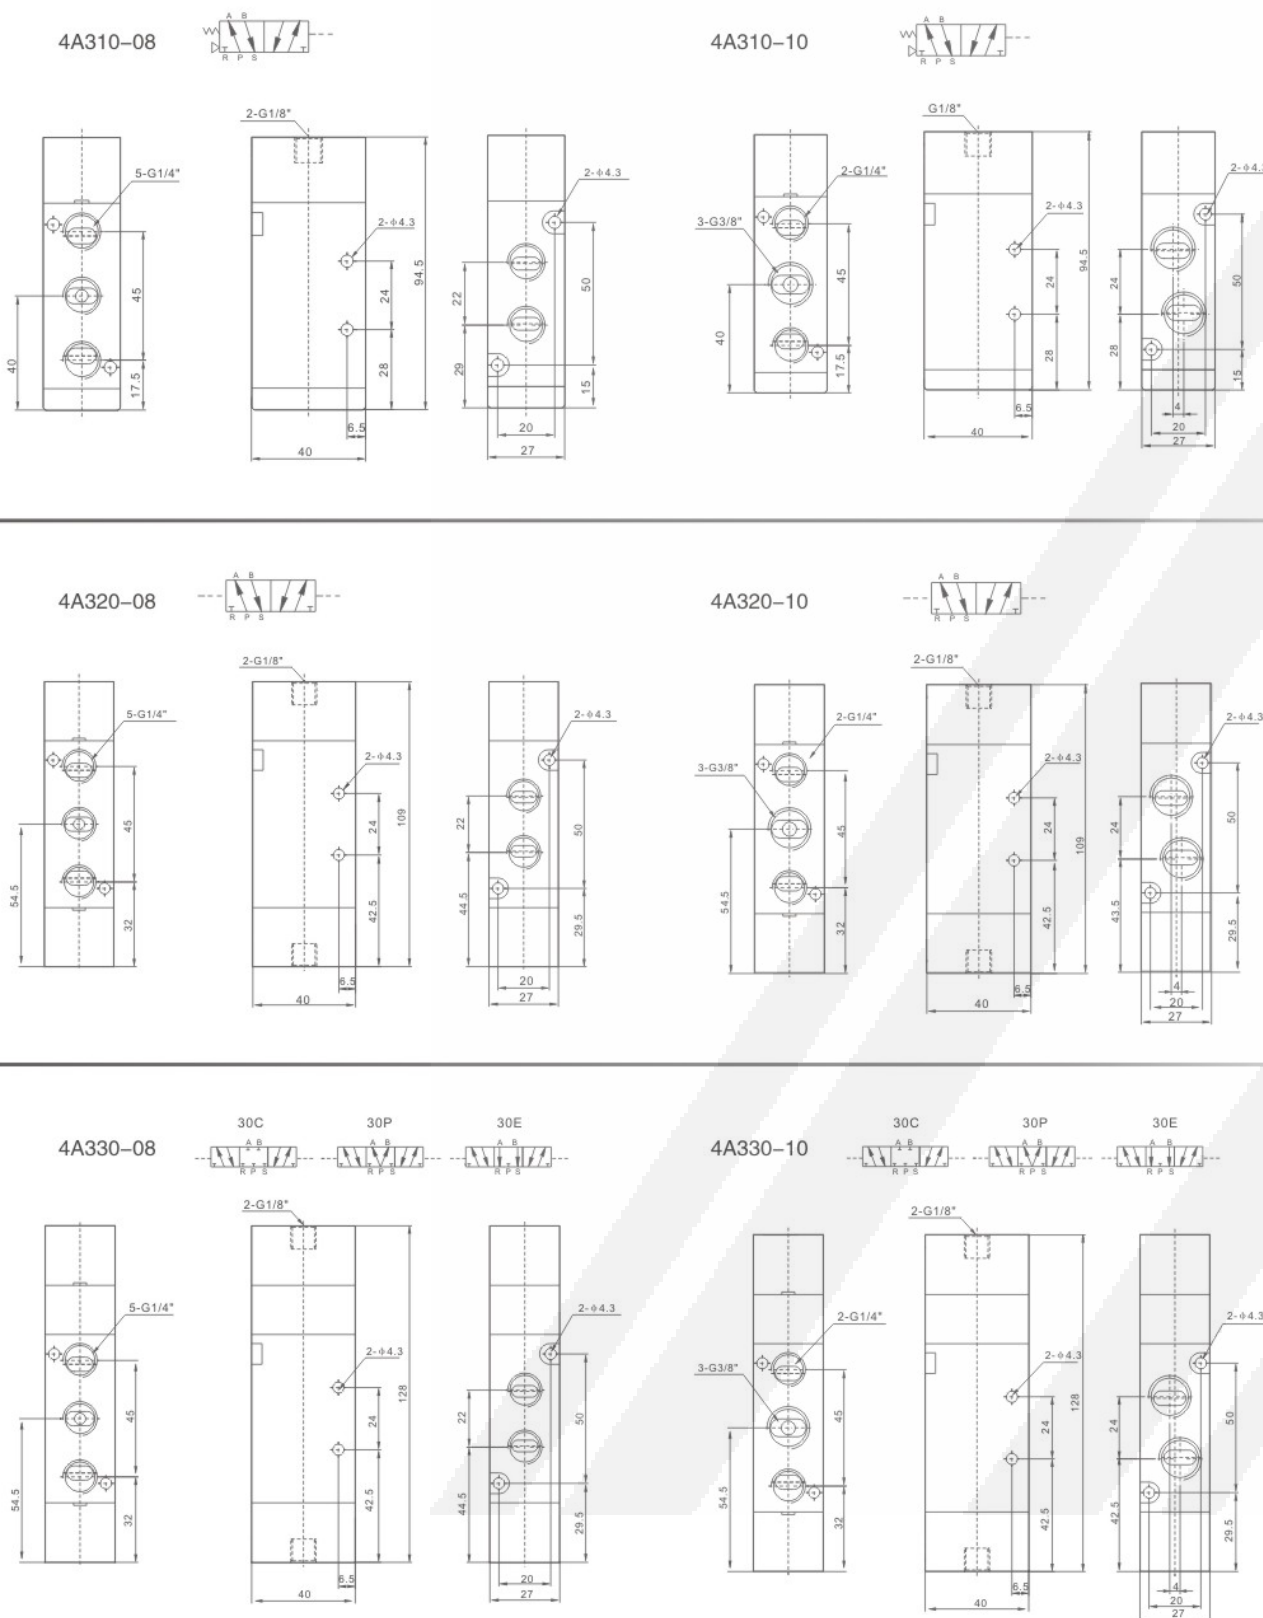

4V、3V300 Series Solenoid Valve, 4A、3A 300 Series Pneumatic Control Valve

Overall Dimensions

