


Hembras giratorias rectas rosca BSP cono 60°

Acero Inoxidable AISI 316-L

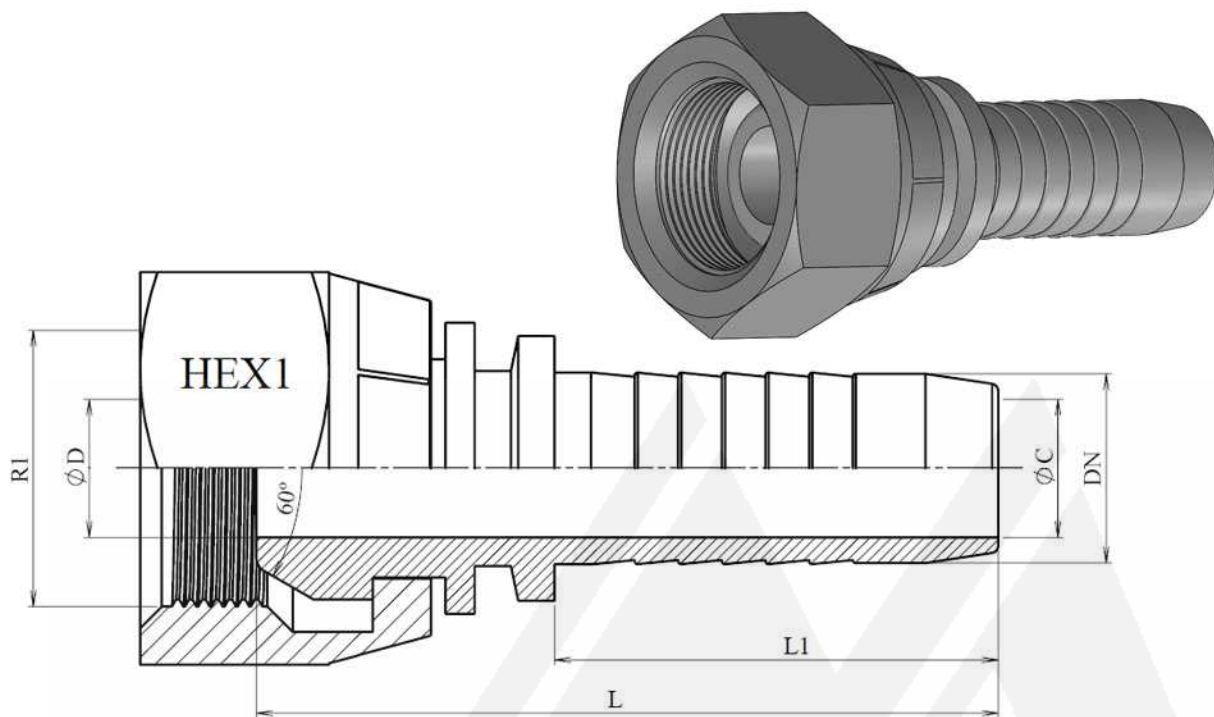

DN	R1	L	L1	HEX 1	ØC	ØD
3.2 mm	1/8" BSP	30,2	15	14	2	3
1/8"	1/8" BSP	36	22	14	2	2
3/16"	1/8" BSP	38	24	14	3	2
1/4"	1/8" BSP	42,5	28	14	4	2
3/16"	1/4" BSP	39,5	24	19	3	4
1/4"	1/4" BSP	44	28	19	4	4
5/16"	1/4" BSP	44,3	28	19	5,5	5,5
3/8"	1/4" BSP	46	29,5	19	7	4
1/4"	3/8" BSP	45,5	28	22	4	7
5/16"	3/8" BSP	45,8	28	22	5,5	5,5
3/8"	3/8" BSP	47,5	29,5	22	7	7
1/2"	3/8" BSP	50	29,5	22	9,5	7
3/8"	1/2" BSP	49,5	29,5	27	7	7
1/2"	1/2" BSP	51	30,5	27	9,5	9,5
5/8"	1/2" BSP	54,8	34	27	12	9,5
1/2"	5/8" BSP	51	30,5	30	9,5	12
5/8"	5/8" BSP	54,8	34	30	12	12
1/2"	3/4" BSP	53,5	30,5	32	9,5	15
5/8"	3/4" BSP	57,3	34	32	12	12
3/4"	3/4" BSP	63,5	39	32	15	15
5/8"	1" BSP	61,5	34	41	12	12
3/4"	1" BSP	66,5	39	41	15	19
1"	1" BSP	75,5	47	41	19	19
1"	1"1/4 BSP	75,5	47	50	19	26
1"1/4	1"1/4 BSP	84,5	54,5	50	26	26
1"1/4	1"1/2 BSP	88,5	54,5	55	26	30,8
1"1/2	1"1/2 BSP	92	58	55	32	32

Conexiones Standard

Conexiones BSP

Hembras giratorias rectas rosca BSP cono 60°

Acero Inoxidable AISI 316-L

DN	R1	L	L1	HEX 1	ØC	ØD
1"1/2	2" BSP	89,5	58	70	32	44
2"	2" BSP	103	72	70	44	44
2"	2"1/2 BSP	110	72	70	44	44
2"1/2	2"1/2 BSP	117	89	85	55	55
3"	3" BSP	133	90	100	68	68