


Cabezas de articulación

Rod ends

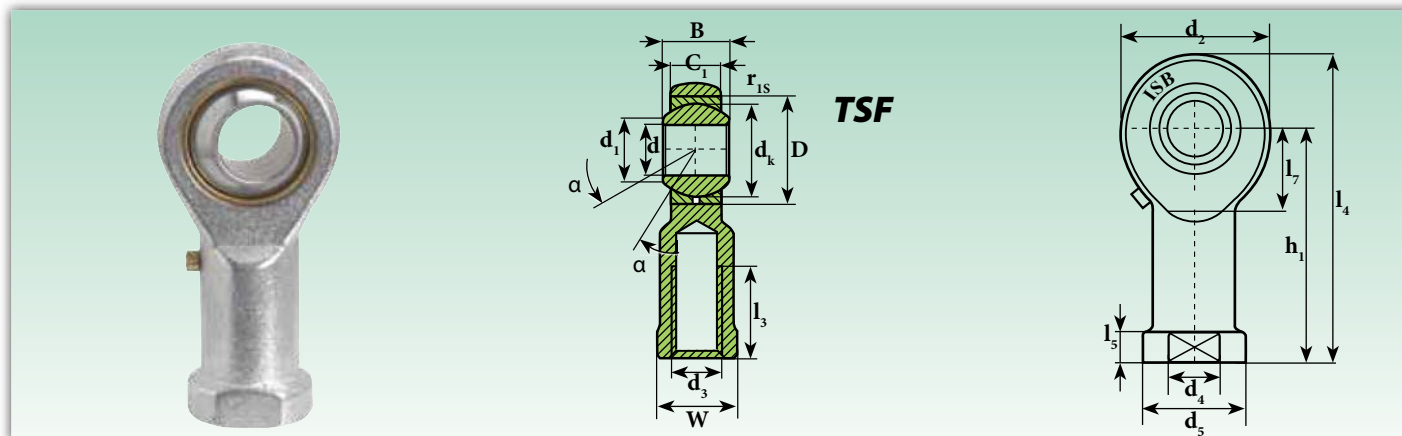

Sigla ¹⁾ Designation ¹⁾	Dimensiones mm Dimensions mm																	Grados Degrees	Distancia de los bordes Distance from edges (mm.)	Carga Ratings load		Peso Weight
	d H7	d ₁	d ₂	d ₃	d ₄	d ₅	d _k	B	C ₁	D	h ₁	I ₃ *	I ₄	I ₅	I ₇	W	≈ α	r _{1smin}	Dinamico C Dinamyc C KN	Estático C ₀ Static C ₀ KN	≈ Kg	
GAM5	5	7,7	16	M 5x0,8	9	11	11,11	8	6	13	27	14	35	4	10	9	13		0,3	3,25	4,1	0,016
GAM6	6	9	18	M 6x1	10	13	12,70	9	6,75	16	30	14	39	5	11	11	13		0,3	4,3	5,3	0,022
GAM8	8	10,4	22	M 8x1,25	12,5	16	15,88	12	9	19	36	17	47	5	13	14	14		0,3	6,8	9,2	0,03
GAM10	10	12,9	26	M 10x1,5	15	19	19,05	14	10,5	22	43	21	56	6,5	15	17	13		0,3	10	12	0,08
GAM10125	10	12,9	26	M 10x1,25	15	19	19,05	14	10,5	22	43	21	56	6,5	15	17	13		0,3	10	12	0,08
GAM12	12	15,4	30	M 12x1,75	17,5	22	22,23	16	12	26	50	24	65	6,5	17	19	13		0,3	13	17	0,12
GAM12125	12	15,4	30	M 12x1,25	17,5	22	22,23	16	12	26	50	24	65	6,5	17	19	13		0,3	13	17	0,12
GAM14	14	16,9	34	M 14x2	20	25	25,40	19	13,5	28	57	27	74	8	18	22	16		0,3	17	22	0,14
GAM14150	14	16,9	34	M 14x1,5	20	25	25,40	19	13,5	28	57	27	74	8	18	22	16		0,3	17	22	0,14
GAM14200	15	18,12	36	M 14x2	22	26	26,99	20	14	-	61	30	79	8	-	22	-		0,3	19	26	0,18
GAM16	16	19,4	40	M 16x2	22	27	28,58	21	15	32	64	33	83	8	23	22	15		0,3	21	28	0,22
GAM16150	16	19,4	40	M 16x1,5	22	27	28,58	21	15	32	64	33	83	8	23	22	15		0,3	21	28	0,22
GAM16150	17	20,6	42	M 16x1,5	25	31	30,16	22	16	-	67	34	88	10	-	27	15	0,3		22	30	0,26
GAM18	18	21,9	44	M 18x1,5	25	31	31,75	23	16,5	35	71	36	92	10	25	27	15		0,3	26	34	0,32
GAM20	20	24,4	50	M 20x1,5	27,5	34	34,93	25	18	40	77	40	100	10	26	30	14		0,3	31	40	0,42
GAM22	22	25,8	50	M 22x1,5	30	37	38,10	28	20	42	84	43	109	12	29	32	15		0,3	38	50	0,61
GAM24	25	29,6	60	M 24x2	33,5	42	42,85	31	22	47	94	48	124	12	32	36	15		0,3	47	63	0,81
GAM27	28	32,3	66	M 27x2	37	46	47,59	35	25	-	103	53	136	12	34	41	15		0,3	59	81	1,20
GAM30	30	34,8	70	M 30x2	40	50	50,80	37	25	55	110	56	145	15	37	41	17		0,3	63	86	1,40
GAM30	30	34,8	70	M 27x2	40	50	50,80	37	25	55	110	60	145	15	37	41	17		0,3	63	86	1,40

Bajo demanda, están disponibles en acero inoxidable (aro interior AISI 440 C - aro exterior AISI 304)

Under request, stainless steel available (AISI 440 C inner ring - AISI 304 housing)



¹⁾ Para rosca a izquierdas agregar el sufijo "L" (ejemplo: TSFL..)
The shank of ball joint housing may be left-hand thread, for left-hand thread suffix "L" is added (example: TSFL..)

²⁾ Tipo con rosca CETOP thread type

Acoplamiento de deslizamiento: acero/bronce

Sliding coupling: steel/bronze

TSF equivalente a equivalent to: GIKR...- PB INA y and SIKAC...M SKF

* Longitud mínima Minimum lenght