


5/2 Way Valves – Series S9-G1/4

5/2 Way Valves Series S9 G1/4

Actuation:

- Hand lever
- Safety hand lever
- Pneumatic
- Electrical pilot operated
- Electrical pilot operated with external pilot air




Versions

- with external pilot air
- with biased position
- version to ATEX Standard


Hand lever actuated

Type: S9 511-1/4, S9 511RF-1/4

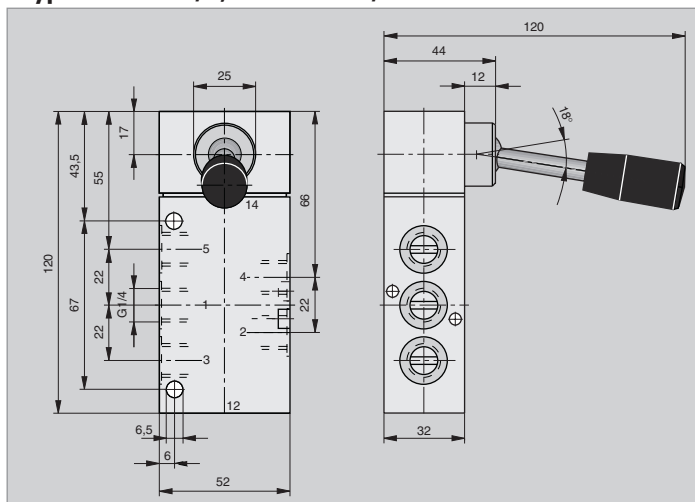


Safety hand lever actuated

Type: S9 511S-1/4

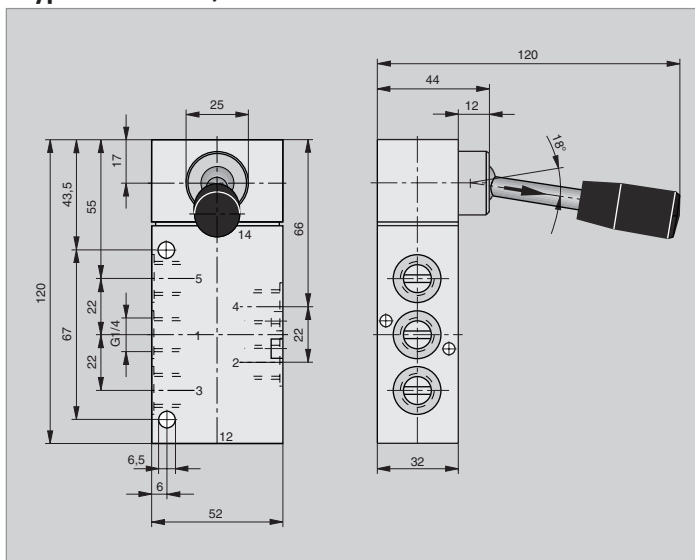

Rotary lever actuated

Type: S9 512-1/4, S9 512RF-1/4

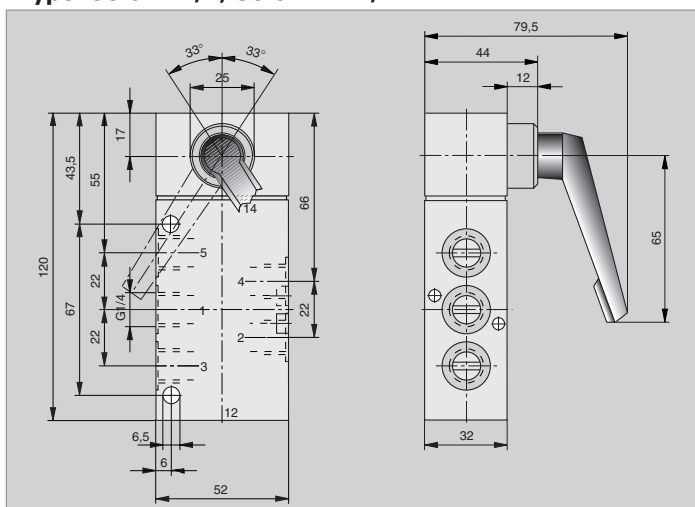


Order Instructions see page 62, 63, characteristics see page 38, 39

P-supply manifolds and RPS-supply manifolds see page 93, 95, valve islands see page 75-83


Pneumatically actuated

Type: S9 561-1/4, S9 562-1/4, S9 561RF-1/4

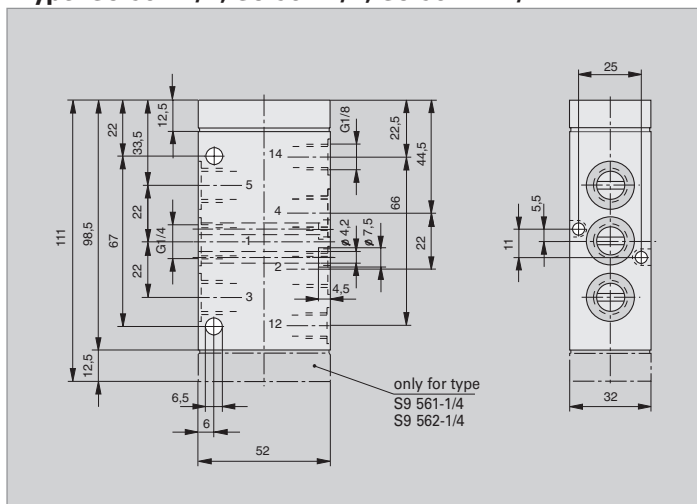


Electrically actuated

Type: S9 581(S)-1/4, S9 582(S)-1/4, S9 581(S)RF-1/4

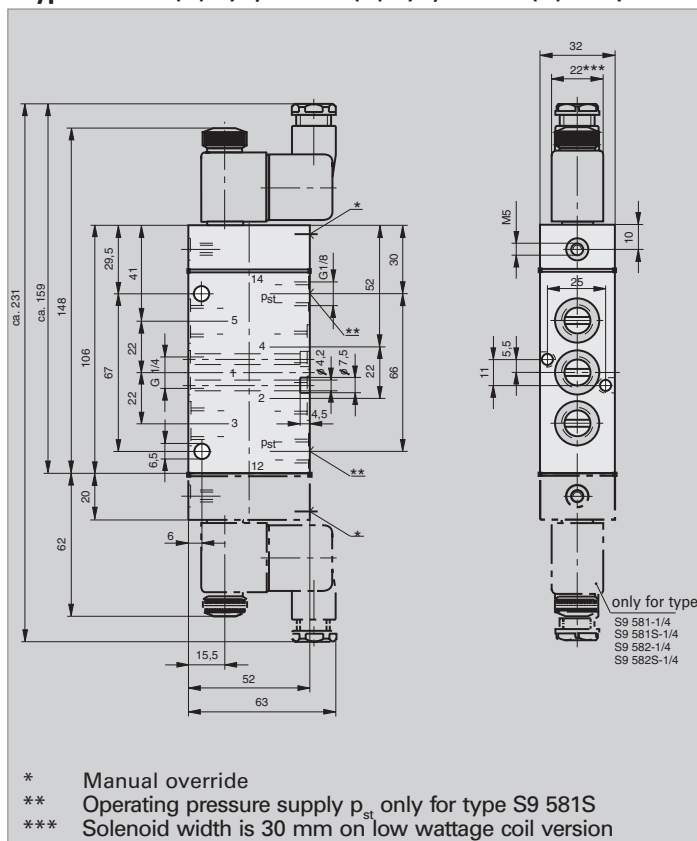

Solenoid for use in EX areas

Dimensions

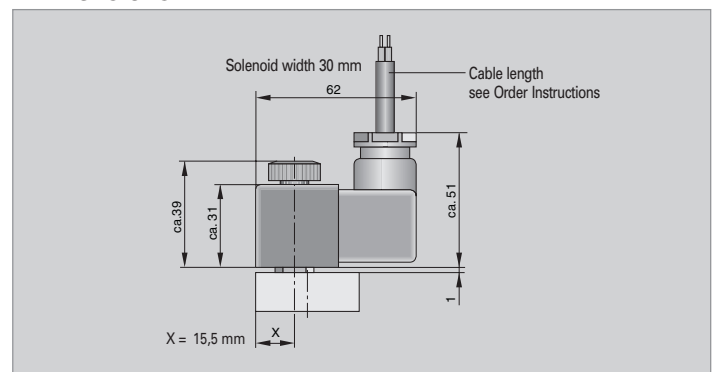

For more information on valves to ATEX standards see page 39, 63

Order Instructions see page 62, 63, characteristics see page 38, 39
P-supply manifolds and RPS-supply manifolds see page 93, 95, valve islands see page 75-83