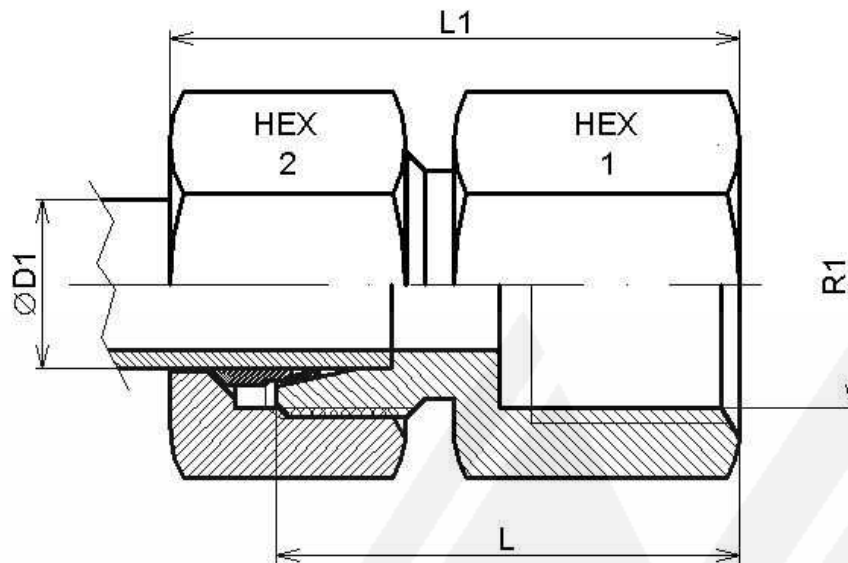


Racor recto hembra rosca BSP

Artículo	ØD1	Serie	R1	Presión trabajo (bar)	L	L1	HEX 1	HEX 2
TN14706L18	6	L	1/8" BSP	315	26	34	14	14
TN14708L14	8	L	1/4" BSP	315	31	39	19	17
TN14710L14	10	L	1/4" BSP	315	32	40	19	19
TN14710L38	10	L	3/8" BSP	315	33	41	22	19
TN14710L12	10	L	1/2" BSP	315	37	45	27	19
TN14712L38	12	L	3/8" BSP	315	33	41	22	22
TN14712L12	12	L	1/2" BSP	315	37	45	27	22
TN14715L12	15	L	1/2" BSP	315	38	46	27	27
TN14718L12	18	L	1/2" BSP	315	38	47	27	32
TN14722L34	22	L	3/4" BSP	160	43	52	32	36
TN14728L16	28	L	1" BSP	160	45,5	54,5	41	41
TN14735L114	35	L	1"1/4 BSP	160	51,5	62,5	50	50
TN14742L112	42	L	1"1/2 BSP	160	53,5	65,5	55	60
TN14706S14	6	S	1/4" BSP	400	33	41	19	17
TN14708S14	8	S	1/4" BSP	400	33	41	19	19
TN14710S38	10	S	3/8" BSP	400	34	43	24	22
TN14714S12	14	S	1/2" BSP	400	40	50	27	27
TN14716S12	16	S	1/2" BSP	400	40	50	27	30
TN14720S34	20	S	3/4" BSP	315	45	56	36	36
TN14725S1	25	S	1" BSP	315	49,5	61,5	41	46
TN14730S114	30	S	1"1/4 BSP	315	55,5	68,5	50	50
TN14738S112	38	S	1"1/2 BSP	250	59,5	74,5	60	60