


Llaves de paso alta presión de 3 vías

Llaves paso 3 vías hembra-hembra-hembra (tipo L)

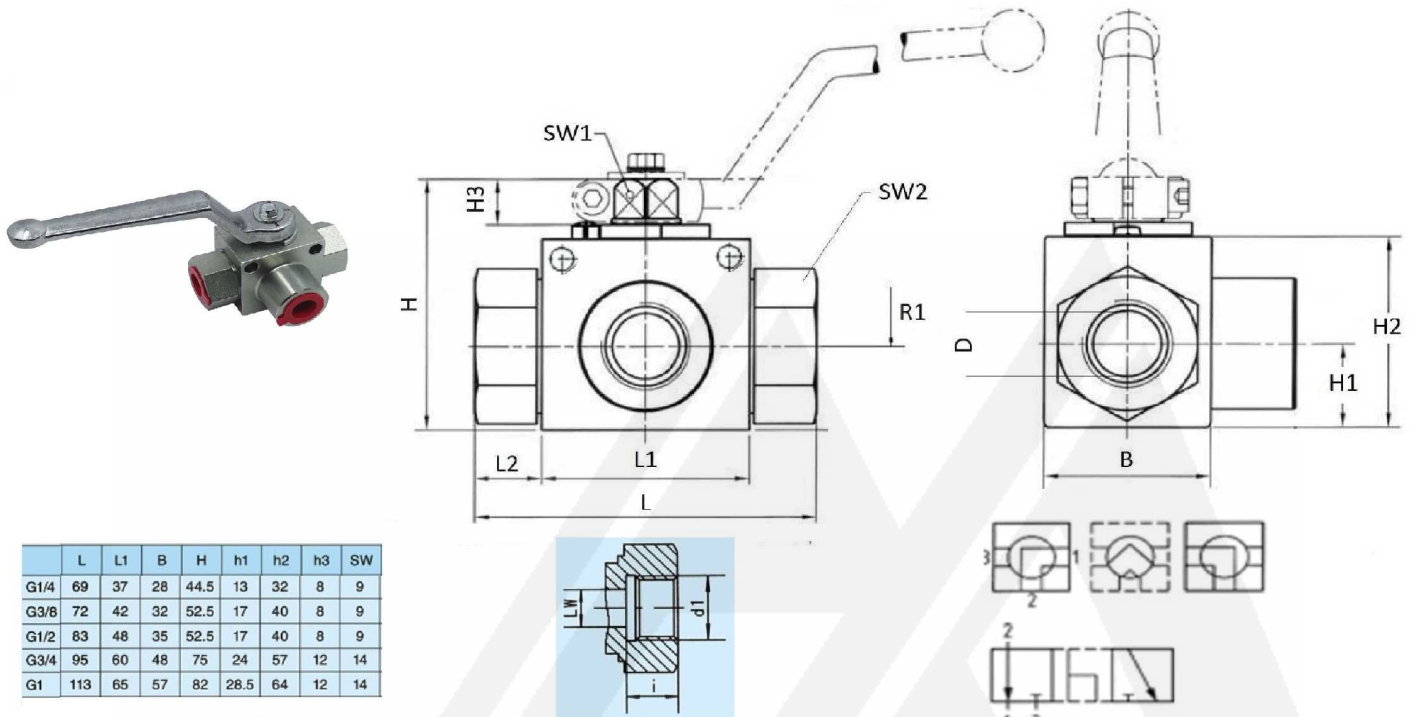

	L	L1	B	H	h1	h2	h3	SW
G1/4	69	37	28	44.5	13	32	8	9
G3/8	72	42	32	52.5	17	40	8	9
G1/2	83	48	35	52.5	17	40	8	9
G3/4	95	60	48	75	24	57	12	14
G1	113	65	57	82	28.5	64	12	14

Con agujeros de fijación

Juntas estándar: NBR

Asiento bola: POM (polioximetileno)

Temp trabajo: -20°C / +100°C

Maneta incluida (angular)

Artículo	DN	R1	Presión trabajo (bar)	Vías
VPT14	6	1/4" BSP	500	H-H-H
VPT38	10	3/8" BSP	500	H-H-H
VPT12	13	1/2" BSP	500	H-H-H
VPT34	20	3/4" BSP	500	H-H-H
VPT1	25	1" BSP	500	H-H-H