




Balfit® Compression Ring Pipe Fittings

Balfit® Metric Male Swivel Adapter – 34.112.

carbon steel parallel Metric thread male stud 24° swivel adapter

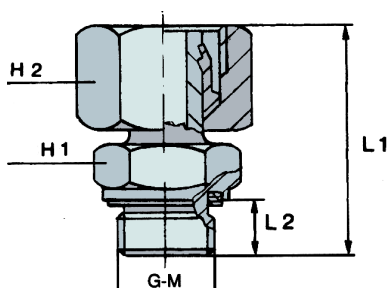

According to **ISO 8434-1** According to **DIN 2353**

Material: Carbon Steel

Finish: Zinc-plated

part number	Ø tube	thread	dimensions							working pressure	ISO series
	mm	G	L1	L2	H1	H2				MPa	
34.112.06LM10	6	10x1	24,5	8	14	14				31.5	L
34.112.08LM12	8	12x1,5	26,5	12	17	17				31.5	L
34.112.10LM14	10	14x1,5	27,5	12	19	19				31.5	L
34.112.12LM16	12	16x1,5	30,5	12	22	22				31.5	L
34.112.15LM18	15	18x1,5	31,5	12	24	27				31.5	L
34.112.18LM22	18	22x1,5	31,5	14	27	32				31.5	L
34.112.22LM26	22	26x1,5	32,5	16	32	36				16.0	L
34.112.28LM33	28	33x2	35	18	41	41				16.0	L
34.112.35LM42	35	42x2	42,5	20	50	50				16.0	L
34.112.42LM48	42	48x2	46,5	22	55	60				16.0	L
34.112.06SM12	6	12x1,5	27	12	17	17				63.0	S
34.112.08SM14	8	14x1,5	29,5	12	19	19				63.0	S
34.112.10SM16	10	16x1,5	32	12	22	22				63.0	S
34.112.12SM18	12	18x1,5	34	12	24	24				63.0	S
34.112.14SM20	14	20x1,5	36,5	14	27	27				63.0	S
34.112.16SM22	16	22x1,5	37	14	27	30				40.0	S
34.112.20SM27	20	27x2	43	16	32	36				40.0	S
34.112.25SM33	25	33x2	48	18	41	46				40.0	S
34.112.30SM42	30	42x2	51	20	50	50				40.0	S
34.112.38SM48	38	48x2	60	22	55	60				31.5	S

also available:

Balfit® Stainless Steel 24° Compression Ring

(add an 'S' at the end of the part number; ex: 34.112.06SM12)

Construction characteristics and dimensions may be changed at any time without prior notice.

The data contained herein is information purposes only and does not enlarge, amend or imply any warranty other than provided by the manufacturer with the product. Any use of the product not in conformance with the manufacturer's instructions may be dangerous.

Only items in this catalogue are carried in stock. Some items are subjected to minimum quantities or sold only in multiples of standard quantities. Please refer to the price list or contact our commercial department.

Balflex® – The European Technology